

RADOX OFL SFR 150/250V (i)


Fire & Mud Resistant Instrumentation cable

General Properties

Mud, diesel fuel, oil, ozone, hydrolysis resistant, excellent flexibility, light weight, halogen free, flame retardant and FIRE RESISTANT, easily strippable, free of hygroscopic material, instrumentation cable following BFOU(i).

Application

Highly flexible cable for fixed and free installations for electrical instrument, control alarm and communication systems, applications where harsh environments can generate a potential risk on life and equipment in areas exposed to mud, oil and drilling fluids and/or safety areas.

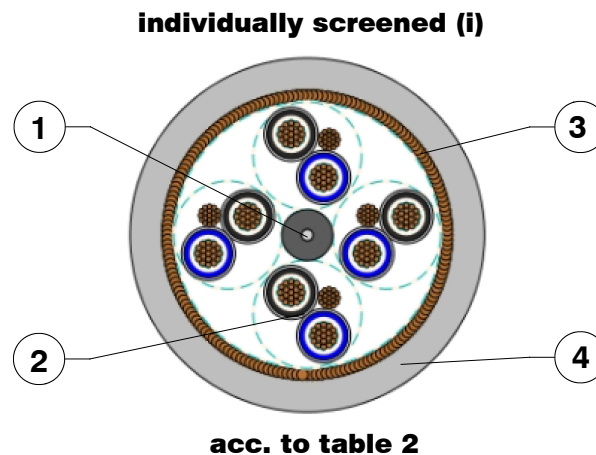

- | | | |
|----|-------------------------------|---|
| 1. | Center und Fillers (optional) | non hygroscopic |
| 2. | Cores RADOX
Type OFL FR | Conductor: Stranded tin plated copper
Wrapping: Mica Tape
Insulation: RADOX EI303 (thin-wall)
Colours: see table 2

Drain wire: Flexible tin plated copper
Wrapping: Alu Tape
Wrapping: Tape |
| 3. | Screen | Tin plated copper braid, coverage density: $\geq 90\%$ |
| 4. | Sheath | RADOX Elastomer S FH
Type SHF2 acc. to IEC 60092-360 and NEK TS 606
Colour: Grey or Blue acc. NEK TS 606: 2016 |

Cable marking

Outer Diameter > 20mm :

HUBER+SUHNER RADOX OFL SFR 150/250V [cable type] SHF2 M 90°C

IEC 60331-1 IEC 60332-3-22 [part no]-[batch no] [date of manufacture] [production place]

Outer Diameter \leq 20mm :

HUBER+SUHNER RADOX OFL SFR 150/250V [cable type] SHF2 M 90°C

IEC 60331-2 IEC 60332-3-22 [part no]-[batch no] [date of manufacture] [production place]

Copyright 2023 HUBER+SUHNER AG. This document may not be amended and its content is confidential. It may not be passed on to third party which are not bound by confidentiality.

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

HUBER+SUHNER AG

Low Frequency Division

CH-8330 Pfäffikon



+41 (0)44 952 22 11



+41 (0)44 952 26 40

www.hubersuhner.com

RADOX OFL SFR 150/250V (i)

Fire & Mud Resistant Instrumentation cable

Technical data

acc. to IEC 60092-376 and - 350

Rated voltage a.c. $U_0/U (U_m)$	150/250 (300) ...	V
Max. voltage d.c. conductor to earth	250	V
Max. voltage d.c. conductor to conductor	500	V
Test voltage a.c.	2000	V
Test voltage d.c.	4800	V

Storage & Installation recommendation

Max. rated conductor temperature normal operation IEC 60092	.+90	°C
Temperature index of core insulation TI/20kh	+135	°C
Temperature index of sheath TI/20kh	+130	°C
Max. storage temperature	+40	°C
Max. storage temperature . \leq 5000h	+65	°C
Min. operation, installation and handling temperature	-40	°C
Min. storage temperature	-50	°C

Max. tensile load, only for installation

50 x A	N
--------------	---

A = number of conductors cross section mm²

Min. bending radius fixed installation	D \leq 12 mm	3 x D
.....	D > 12 mm	4 x D
..... free movement	D \leq 12 mm	5 x D
.....	D > 12 mm	6 x D

The cables pass the following fluid tests

Drilling fluid resistance for SHF mud	Fulfilled	NEK TS 606, 4.4.1
Mineral oil type IRM 903	7 d / 100 °C	NEK TS 606, 4.4.1 Cat. b
Calcium bromide brine (45 % w/w CaBr ₂ / H ₂ O)	56 d / 70 °C	NEK TS 606, 4.4.1 Cat. c
Base oil EDC 95-11	56 d / 70 °C	NEK TS 606, 4.4.1 Cat. c
Drilling fluid resistance	Fulfilled	IEC 60092-360
Mineral oil type IRM 902	24 h / 100 °C	IEC 60811-404
Mineral oil type IRM 902	7 d / 100 °C	IEC 60092-360, An. C
Mineral oil type IRM 903	7 d / 100 °C	IEC 60092-360, An. D
Calcium bromide brine (45 % w/w CaBr ₂ / H ₂ O)	56 d / 70 °C	IEC 60092-360, An. D
Oil based test fluid (CAS no.: 64742-46-7)	56 d / 70 °C	IEC 60092-360, An. D

RADOX OFL SFR 150/250V (i)

Fire & Mud Resistant Instrumentation cable

The cables pass the following fire tests

Electric cables under fire conditions

Outer Diameter > 20 mm	830°C, 120 min.	IEC 60331-1
Outer Diameter ≤ 20 mm	830°C, 120 min.	IEC 60331-2
Fire protection in ships	Fulfilled	IEC 60092-350 + DNVGL-CP-0400
Vertical flame spread of a single cable	50 < L ≤ 540 mm	IEC 60332-1-2
Vertical flame spread of bunched cables	L ≤ 2.5 m	IEC 60332-3-22 Cat. A
Smoke density	T ≥ 70 %	IEC 61034-1,2
Corrosivity of combustion gases	pH ≥ 4.3, C ≤ 10 μS/mm	IEC 60754-2
Amount of halogen acid gas	HCl+HBr ≤ 0.5%	IEC 60754-1
Content of fluorine	HF ≤ 0.1 %	IEC 60684-2, 45.2
Toxicity	ITC ≤ 3	EN 50305, 9.2

Approvals

DNV Certificate TAE00004KC

Applicable standards

DNVGL-CP-0400	Class programme - Type approval - Lightweight electric cables
EN 50306	Railway rolling stock cables having special fire performance - Thin wall
NEK TS 606	Cables for offshore installation, halogenfree and/or mud resistant
IEC 60092-350	General construction and test methods of cables for shipboard and offshore applications
IEC 60092-360	Insulating and sheathing materials for shipboard and offshore units, power, control, instrumentation and telecommunication cables
IEC 60092-376	Electrical Installations in ships, cables for control and instrumentation circuits 150/250V (300V)

Table 1: Capacitance, Inductance & L/R ratio

Cable type mm ²	Family	Type of measuring Core - Core		L/R Ratio μH/Ω	Resistance at 20°C max. Ω/km
		C nf/km nom.	L μH/km** nom.		
pair 0.75	OFL SFR (i)	95	0.71	13.3	26.7
triple 0.75	OFL SFR (i)	90*	0.81*	15.2*	26.7
pair 1.5	OFL SFR (i)	115	0.65	23.7	13.7
triple 1.5	OFL SFR (i)	110	0.71	25.9	13.7
pair 2.5	OFL SFR (i)	130	0.6	36.5	8.21
triple 2.5	OFL SFR (i)	125*	0.62*	37.8*	8.21

*calculated values, verification pending

**measurements were carried at 1kHz, all values refer to (1xnxm)mm²

EX attachment : worst case values depend on construction of cables and customer applications, therefore worst case values (inductivity / capacity / LR ratio) are available only on request.

RADOX OFL SFR 150/250V (i)

Fire & Mud Resistant Instrumentation cable

Core colours

Pair: Black, Light Blue

Triple: Black, Light Blue, Brown

Table 2: individually screened (i)

Elements n x	Core in Element	Core Cross section mm ²	Con- ductor n x diameter mm	Nom. diameter after twisting mm	Screen Wire diameter nom mm	Overall screen cross section nom mm ²	Copper weight nom kg/100m	Cable diameter mm ● = Fixed ○ = Apprx.	Cable weight nom kg/100m	Sheat colour	H+S part no
1	2	0.75	19 x 0.23	4.8	0.16	2.2	3.9	7.60 +/- 0.3 ●	9.9	BU GY	85183132 85189568
2	2	0.75	19 x 0.23	9.4	0.21	5.2	8.6	11.50 +/- 0.4 ●	21.9	BU GY	85189582 85186529
4	2	0.75	19 x 0.23	11.5	0.21	6.3	13.4	14.50 +/- 0.5 ●	31.5	BU GY	85119600 85189598
8	2	0.75	19 x 0.23	14.3	0.21	8.3	22.7	17.20 +/- 0.5 ●	45.2	BU GY	85192254 85189574
12	2	0.75	19 x 0.23	18.5	0.21	10.7	32.5	21.70 +/- 0.5 ○	65.9	BU GY	85189600 85117102
16	2	0.75	19 x 0.23	21.7	0.25	16.2	45.1	25.8 +/- 0.6 ●	91.5	BU GY	85192255 85189576
24	2	0.75	19 x 0.23	26.8	0.30	22.2	66.6	31.20 +/- 0.6 ○	133.0	BU GY	85192256 85189579
1	3	0.75	19 x 0.23	5.1	0.16	2.5	4.9	8.00 +/- 0.3 ●	11.2	BU GY	85192257 85185608
2	3	0.75	19 x 0.23	10.4	0.21	5.9	10.8	13.90 +/- 0.4 ○	27.8	BU GY	85192258 85192250
4	3	0.75	19 x 0.23	12.3	0.21	7.1	17.0	15.80 +/- 0.5 ○	37.5	BU GY	85192259 85192251
8	3	0.75	19 x 0.23	15.8	0.21	8.9	29.2	19.50 +/- 0.5 ○	57.7	BU GY	85192260 85192252
1	2	1.5	37 x 0.23	5.8	0.16	2.7	5.9	8.75 +/- 0.3 ●	13.6	BU GY	85189607 85186530
2	2	1.5	37 x 0.23	11.5	0.21	6.7	11.9	13.60 +/- 0.4 ○	30.3	BU GY	85192261 85189571
4	2	1.5	37 x 0.23	13.7	0.21	7.9	21.2	17.20 +/- 0.5 ●	45.3	BU GY	85192262 85189577
8	2	1.5	37 x 0.23	17.3	0.21	10.1	37.0	20.40 +/- 0.5 ○	65.5	BU GY	85192263 85189581
12	2	1.5	37 x 0.23	22.7	0.25	15.3	55.8	25.7 +/- 0.6 ●	101.1	BU GY	85192264 85189583

RADOX OFL SFR 150/250V (i)
Fire & Mud Resistant Instrumentation cable

Elements n x	Core in Element	Core Cross section mm ²	Con- ductor n x diameter mm	Nom. diameter after twisting mm	Screen Wire diameter nom mm	Overall screen cross section nom mm ²	Copper weight nom kg/100m	Cable diameter mm ● = Fixed ○ = Apprx.	Cable weight nom kg/100m	Sheat colour	H+S part no
16	2	1.5	37 x 0.23	26.3	0.25	18.0	72.5	30.3 +/- 0.6 ●	132.7	BU GY	85192265 85189599
24	2	1.5	37 x 0.23	32.1	0.30	22.2	107.1	35.60 +/- 0.7 ●	190.8	BU GY	85189575 85183134
1	3	1.5	37 x 0.23	6.3	0.16	3.1	7.7	9.20 +/- 0.3 ●	15.6	BU GY	85192266 85189606
2	3	1.5	37 x 0.23	12.6	0.21	7.1	16.4	16.10 +/- 0.5 ○	39.1	BU GY	85192267 85189580
4	3	1.5	37 x 0.23	15.0	0.21	8.3	27.2	18.70 +/- 0.5 ○	54.5	BU GY	85192268 85189566
8	3	1.5	37 x 0.23	20.1	0.21	11.9	49.7	24.30 +/- 0.5 ○	91.5	BU GY	85192269 85189572
1	2	2.5	37 x 0.29	6.8	0.16	3.0	8.0	9.80 +/- 0.3 ●	17.6	BU GY	85192270 85189578
1	3	2.5	37 x 0.29	7.3	0.16	3.3	13.7	10.40 +/- 0.4 ○	23.8	BU GY	85189573 85192253

Other articles on request